

The Forza **FX Series** offers an enhanced level of protection specially designed for your high performance office equipment like servers, sensitive electronics and home theater components.

**FEATURES**

- LCD displays real time status information
- Easy to read LCD visual display with bright blue back light
- Power protection for home and office equipment
- Boost & buck AVR to stabilize voltage
- 6 outlets - four (4) with surge protection, battery backup and AVR, plus two (2) surge only outlets
- Network, phone, fax & modem protection (RJ-45)
- USB communication port
- Long back up time
- Power management software CD
- 660-Joule surge rating
- Coaxial protection

Designed for  
Home Theater / Server & Network




Turn it on. Keep it on.




**LCD DISPLAY**

The Forza **FX-2200LCD-C** comes equipped with an easy to read LCD and a blue backlight that displays the battery status, input voltage, output voltage, and operation mode of the UPS.

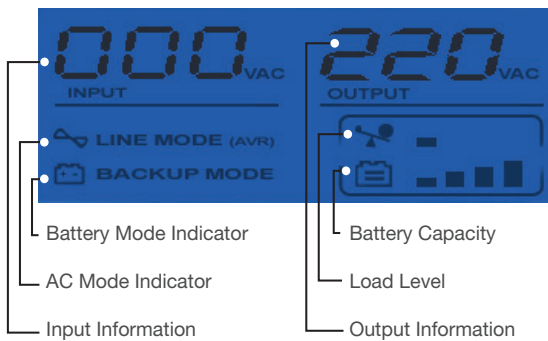

**POWER PROTECTION**

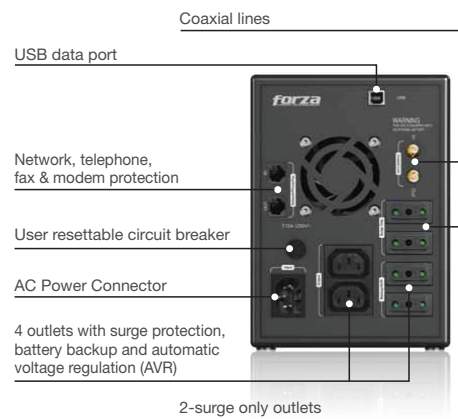

**2200VA**  
**Battery Backup**  
Automatic Voltage Regulator  
660 Joules Surge Protection

**NOW PROTECT IT ALL...**



Connect your digital satellite system (DSS), CATV, cable modem or antenna to the coaxial line in the UPS to prevent surges over this connection.



Now you can feel safe and protected connecting your home or business electronics to the "Surge only" outlets.



Data-line protection jacks to connect network/phone/fax devices and keep communicating safely.



Provide a conditioner and uninterrupted power to your entertainment system or PC with automatic voltage regulator (AVR), surge protection and battery backup "Outlets".

FEATURES		FX-2200LCD-C
<b>CAPACITY</b>		2200VA/1200W
<b>INPUT</b>	Nominal voltage	220/230/240 VCA
	Voltage range	166 - 280 VCA
	Frequency range	50/60Hz
<b>OUTPUT</b>	Voltage regulation	+ / - 10% (battery mode)
	Frequency regulation	+ / - 1 Hz (battery mode)
	Frequency range	45.0Hz ~ 55.0Hz
	Output Waveform	Stepped sine wave
<b>TRANSFER TIME</b>	Typical	4-8ms
<b>BATTERY</b>	Battery Type	12V/7.9Ah x2pcs
	Back-up time*	45 minutes*
	Recharge time	6-hours to 90% after complete discharge
<b>BATTERY</b>	Back-up mode	Sounds every 10 seconds
<b>AUDIBLE ALARM</b>	Low battery	Sounds once every second
	Overload	Sounds every 0.5 second
	Battery replacement	Sounds every 2 seconds
	Fault	Sounds continuously
<b>PROTECTION</b>	Full protection	Discharge, overcharge, short-circuit, and overload protection
<b>PHYSICAL FEATURES</b>	Dimensions DxWxH(mm)	400 x 145 x 205
	Net Weight	10.8 kg
<b>ENVIRONMENT</b>	Operating environment	0- 40°C, 0-90 % relative humidity (non-condensing)
	Noise level	Less than 40dB
<b>INTERFACE</b>	USB port	Windows® 9 /XP/Vista/7, MAC OS, Linux
<b>INDICATOR</b>	LCD screen	The LED remains on during normal operation of the UPS, including in charging and fault modes