


Forza's NT series is designed to provide electric protection for your personal computer and peripherals. With its compact size, the unit is ideal for small work spaces at the office or at home. Although small in size, it provides the maximum protection against the constant threat of electrical supply outages.



FEATURES

- Uninterruptible power system
- Smart UPS with line interactive topology controlled by microprocessor
- Power protection for home and office equipment
- Boost & buck AVR to stabilize voltage
- 4 outlets with battery back up and AVR protection
- Phone, Fax & modem protection (RJ-11)
- Two year full warranty

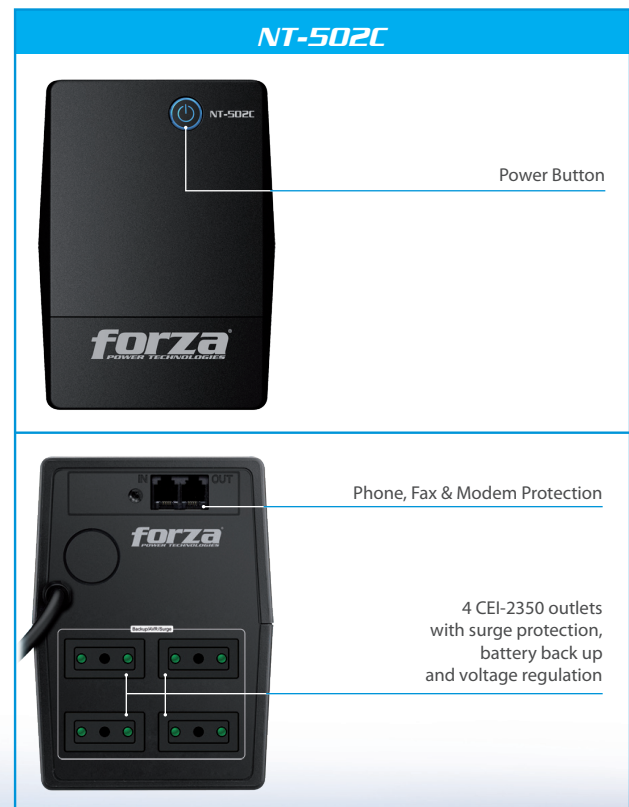

MODEL	FEATURES	NT-502C
CAPACITY		500VA/250W
INPUT	Input Voltage Compatibility	220-240 VAC
	Input Voltage Range	170-280 VAC
	Connection Type	CEI 23-50 (Chile/Uruguay)
	Cord Length	4.9ft/1.5m
	Frequency	45-65Hz (Auto Sensing)
OUTPUT	Output Nominal Voltage	220-240 VAC
	Output Volt Amp Capacity	500VA
	Output Watt Capacity (watts)	250W
	Output Voltage Regulation (Batt. Mode)	± 10%
	Output Frequency	45/65Hz
	Output Frequency Regulation (Batt. Mode)	± 1% (Battery Mode)
	Output Waveform	Modified Sine Wave
	Outlet Receptacles Quantity/Type	4 CEI-2350 outlets
	Full Battery Support and Surge Protection Outlets	4
BATTERY	Battery Type & Number	12V/4.5Ah 1piece
	Back up Time (at a PC load with 17" monitor)	10 minutes
	Recharge Time	10 hours to 90% after complete discharge
FREQUENCY REGULATION	Automatic Frequency Selection	Yes
LINE/BATTERY TRANSFER	Typical Transfer Time	2-6 m.s. typical
	Line Low Transfer to Battery Power	162VAC
	Line High Transfer to Battery Power	268VAC
INDICATOR	AC Mode	Blue LED Lighting
	Battery Mode	Blue LED Lighting, Green LED Flashing
	Fault Mode	Blue LED Lighting
AUDIBLE ALARM	Battery Mode	Sounding every 10 seconds
	Low Battery	Sounding every 1 second
	Overload	Sounding every 0.5 second
	Battery Replacement	Sounding every 2 seconds
	Fault	Continuous sounding
PROTECTION	Full Protection	Line Mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode. 120%+20%/-10%; shutdown immediately and go to fault mode. Battery Mode: 110%+20%/-10%; shutdown after 5 sec. 120%+20%/-10%; shutdown immediately.
PHYSICAL	Unit Dimension, DXWXH (mm)	279 x 101 x 142 mm
	Unit Dimension, DXWXH (in)	13.0 x 3.94 x 5.51 in
	Net Unit Weight (kgs/lbs)	3.55Kg / 7.83lbs
	Packing Dimensions (mm)	388 x 142 x 231 mm
	Packing Dimensions (in)	15.28 x 5.59 x 9.09 in
	Packing Weight (kgs/lbs)	4.2Kg/9.26 lbs
ENVIRONMENT	Operating Environment	0° to +40°, 0 to 90% Relative Humidity (Non-condensing)
	Noise Level	Not to exceed 40dBa, measured 1 meter from any surface
WARRANTY	Product Warranty	2 years
SPECIAL FEATURES	Dataline/Internet/Telephone Line Protection	RJ-11
	"Cold Start" Option	Yes
	Auto Charge	Yes

