


Forza Power Technologies is a leading provider of power protection, power conditioning, and back up management power solutions. Our comprehensive solutions are designed with both the home and business user environment in mind. Our products, improve the manageability, availability, and performance of consumer electronics, computing, network communication and industrial equipment of all sizes.




FEATURES

- Uninterruptible power system
- Power protection for home and office equipment
- Boost & buck AVR to stabilize voltage
- 4 outlets – w/ surge protection, battery back up, AVR (3), and surge protection only (1)
- Phone, Fax & modem protection (RJ-11)
- USB communication port
- Illuminated power button
- Long back up time
- 440 Joules surge rating
- Power management software CD

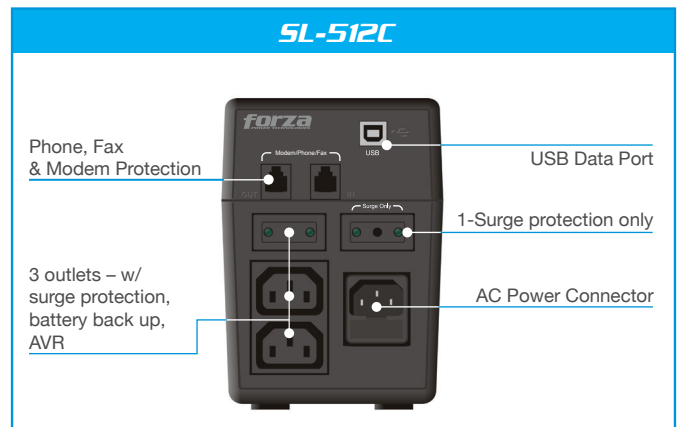

UPS
SL-512C
Battery Backup
500VA
Automatic Voltage Regulator
440 Joules Surge Protection

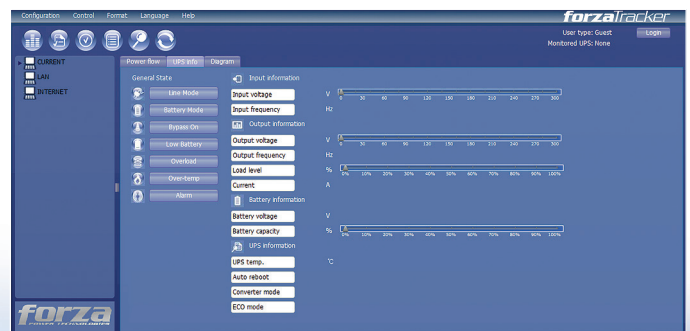

MODEL	FEATURES	SL-512C
CAPACITY		500VA/250W
INPUT	Input Voltage Compatibility	220/240VAC
	Input Voltage Range	162-268VAC
	Connection Type	ITALIAN PLUG (Chile/Uruguay)
	Cord Length	4.9ft/1.5m
	Frequency	45-65Hz (Auto Sensing)
OUTPUT	Output Nominal Voltage	220/240VAC
	Output Volt Amp Capacity	500VA
	Output Watt Capacity (watts)	250W
	Output Voltage Regulation (Batt. Mode)	±10%
	Output Frequency	50/60Hz
	Output Frequency Regulation (Batt. Mode)	50Hz ±1Hz
	Output Waveform	Modified Sine Wave
	Outlet Receptacles Quantity/Type	4 ITALIAN PLUG (Chile/Uruguay)
	Full Battery Support and Surge Protection Outlets	3
	Surge Suppression Outlets Only	1
BATTERY	Battery Type & Number	12V/7AH 1PCS
	Back up Time (at a PC load with 17" monitor)	18 minutes
	Recharge Time	6 hours to 90% after complete discharge
VOLTAGE REGULATION	Voltage Regulation Description	220V ±12%
	Output Boost Feature from 162-198 VAC	+18%
	Output Buck Feature from 242-268 VAC	-15%
FREQUENCY REGULATION	Automatic Frequency Selection	YES
LINE/BATTERY TRANSFER	Typical Transfer Time	2-6 ms typical
	Low come back from battery to line power	169VAC
	High come back from battery to line power	262VAC
INDICATOR	AC Mode	Blue LED Light
	Battery Mode	Blue LED Light, Green LED Flashing
	Fault Mode	Blue LED Light
AUDIBLE ALARM	Battery Mode	Sounding every 10 seconds
	Low Battery	Sounding every 1 second
	Overload	Sounding every 0.5 seconds
	Battery Replacement	Sounding every 2 seconds
	Fault	Continuous sounding
PROTECTION	Full Protection	Line Mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode. 120%+20%/-10%; shutdown immediately and go to fault mode. Battery Mode: 110%+20%/-10%; shutdown after 5 sec. 120%+20%/-10%; shutdown immediately.
	Joules	440J
PHYSICAL	Unit Dimension, DXWXH (mm)	330*100*140
	Unit Dimension, DXWXH (in)	13.0*3.94*5.51
	Net Unit Weight (kgs/lbs)	5kg
	Packing Dimensions (mm)	385 *140*228
	Packing Dimensions (in)	15.16*5.51*8.98
	Gross Packing Weight (kgs/lbs)	5.5kg
ENVIRONMENT	Operating Environment	0° to +40°, 0 to 90% Relative Humidity(Non-condensing)
	Noise Level	Not to exceed 40dBA, measured 1 meter from any surface
WARRANTY	Product Warranty	2 Years
SPECIAL FEATURES	Communication Port	Yes
	Dataline/Internet/Telephone Line Protection	RJ-11
	"Cold Start" Option	YES
	Auto Charge	Yes
ACCESSORIES	USB Cable	Yes
	Monitoring Software	FORZATRACKER

