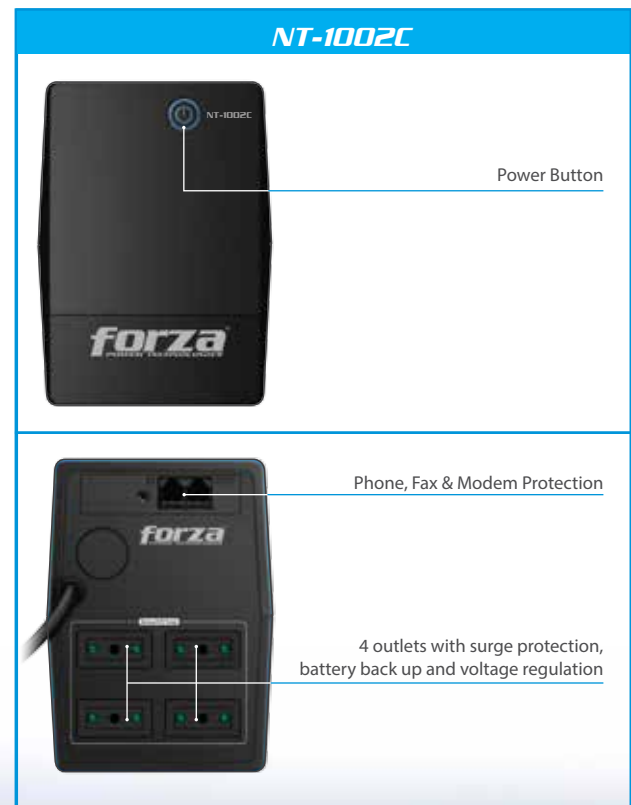**Forza's NT series** is designed to provide electric protection for your personal computer and peripherals. Featuring a compact design, the unit is ideal for small work spaces at the office or at home. Although small in size, it provides the maximum protection against the constant threat of electrical supply outages.

FEATURES

- Uninterruptible power system for home and office equipment
- Automatic voltage regulator
- Power surge and spike protection
- Phone, fax and modem protection
- (4) outlets with battery back up and AVR protection
- Two year full warranty

**UPS
NT-1002C
1000VA**

NT-1002C

Power Button

Phone, Fax & Modem Protection

4 outlets with surge protection, battery back up and voltage regulation

MODEL			NT-1002U
CAPACITY			1000VA/500W
INPUT	Nominal voltage		220V
	Voltage range		162-268VAC
	Frequency		50/60Hz (autosensing)
	AC plug style		1 Italian plug
OUTPUT	Nominal voltage		220V +/- 10%
	Frequency		50/60Hz
	Frequency stability		+/- 1Hz battery mode
	Waveform		Modified sine wave
	Total outlets		4 (Italian plugs)
	Full battery / Surge protection outlets		4
	Surge protection outlets only		0
	Phone/Modem/Fax protection		RJ-11
BATTERY	Type and quantity		12V 9Ah (1)
	Backup time		25 min.
	Recharge time		6 hours to 90% after complete discharge
VOLTAGE REGULATION	Voltage regulation (120/220V)		220V
	Boost feature (120/220V)		Vin x 1.18
	Buck feature (120/220V)		Vin x 0.85
FREQUENCY REGULATION	Automatic frequency selection		Yes
LINE/BATTERY TRANSFER	Typical transfer time		2-6ms
	Low line transfer to battery (120/220V)		162VAC
	High line transfer to battery (120/220V)		268VAC
ALARMS/INDICATORS	Visual indicators		AC mode: solid blue
			Battery mode: flashing blue
			Fault mode: blue light goes out
			Battery mode: sounds every 10 seconds
	Audible		Low battery: Sounds every second
			Overload: sounds every 0.5 second
			Fault: continuous sound
PROTECTION	Full protection		Line mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode.
			120%+20%/-10%; shutdown immediately and go to fault mode.
			Battery mode:120%+20%/-10%; shutdown immediately
	Joules		200J
SPECIAL FEATURES	"Cold start" option		Yes
	Auto charge		Yes
ENVIRONMENT	Operating temperature		32-104º F
	Storage temperature		5-113º F
	Relative humidity		0-90% non-condensing
	Audible noise		<40 dB at one meter
PHYSICAL APPEARANCE	Power switch		Yes (Lighted)
	Housing		ABS Plastic (Flame retardant)
	Color		Black
	Cord length		3ft
	Product dimensions		11 x 4 x 5.6in
	Product weight		10.81b
ADDITIONAL INFORMATION	Warranty		2 Years
	Package content		UPS, User guide
	Box dimensions		12.8 x 5.5 x 8.7in
	Box weight		11.47lb
	UPC		7.98302E+11

EMERGENCY BACKUP   AUTOMATIC VOLTAGE REGULATOR   POWER SURGE & SPIKE PROTECTION   PHONE LINE & PROTECTION   OUTPUT CONNECTORS   KASPERSKY

7 98302 10042 8