


**Forza's NT series** is designed to provide electric protection for your personal computer and peripherals. Featuring a compact design, the unit is ideal for small work spaces at the office or at home. Although small in size, it provides the maximum protection against the constant threat of electrical supply outages.



#### FEATURES

- Uninterruptible power system for home and office equipment
- Automatic voltage regulator
- Power surge and spike protection
- Phone, fax and modem protection
- (4) outlets with battery back up and AVR protection
- Two year full warranty

**UPS**  
**NT-1001D**  
**1000VA**

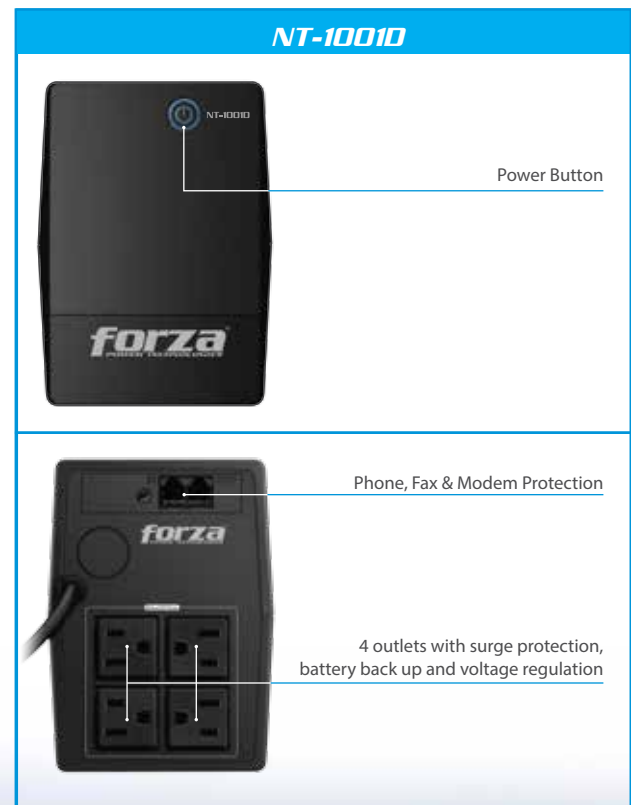

MODEL	NT-1001D	
<b>CAPACITY</b>		1000VA/500W
<b>INPUT</b>	Nominal voltage	120V
	Voltage range	89-145VAC
	Frequency	40Hz - ∞ (autosensing)
	AC plug style	1 NEMA 5-15P
<b>OUTPUT</b>	Nominal voltage	120V +/- 10%
	Frequency	40Hz - ∞
	Frequency stability	+/- 1Hz battery mode
	Waveform	Modified Sine Wave
	Total outlets	4 (NEMA 5-15R)
	Full battery / Surge protection outlets	4
	Surge protection outlets only	0
<b>BATTERY</b>	Phone/Modem/Fax protection	RJ-11
	Type and quantity	12V 9Ah (1)
	Backup time	25 min.
<b>VOLTAGE REGULATION</b>	Recharge time	6 hours to 90% after complete discharge
	Voltage regulation (120/220V)	120V
	Boost feature (120/220V)	Vin x 1.18
<b>FREQUENCY REGULATION</b>	Buck feature (120/220V)	Vin x 0.85
	Automatic frequency selection	Yes
<b>LINE/BATTERY TRANSFER</b>	Typical transfer time	2-6ms
	Low line transfer to battery (120/220V)	89VAC
	High line transfer to battery (120/220V)	145VAC
<b>ALARMS/INDICATORS</b>	Visual indicators	AC mode: solid blue
		Battery mode: flashing blue
	Audible	Fault mode: blue light goes out
		Battery mode: sounds every 10 seconds
<b>PROTECTION</b>	Full protection	Low battery: Sounds every second
		Overload: sounds every 0.5 second
		Fault: continuous sound
	Joules	Line mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode.
		120%+20%/-10%; shutdown immediately and go to fault mode.
<b>SPECIAL FEATURES</b>	Battery mode: 120%+20%/-10%; shutdown immediately	
	"Cold start" option	200J
	Auto charge	Yes
<b>ENVIRONMENT</b>	Operating temperature	Yes
	Storage temperature	32-104° F
	Relative humidity	5-113° F
	Audible noise	0-90% non-condensing
<b>PHYSICAL APPEARANCE</b>	Power switch	<40 dB at one meter
	Housing	Yes (Lighted)
	Color	ABS Plastic (Flame retardant)
	Cord length	Black
	Product dimensions	3ft
	Product weight	11 x 4 x 5.6in
<b>ADDITIONAL INFORMATION</b>	Warranty	10.81b
	Package content	2 Years
	Box dimensions	UPS, User guide
	Box weight	12.8 x 5.5 x 8.7in
	UPC	11.47lb
		7.98302E+11



EMERGENCY BACKUP



AUTOMATIC VOLTAGE REGULATOR



POWER SURGE & SPIKE PROTECTION



PHONE LINE & PROTECTION



OUTPUT CONNECTORS



7 98302\*10043 5