


Forza Power Technologies is a leading provider of power protection, power conditioning, and back up management power solutions. Our comprehensive solutions are designed with both the home and business user environment in mind. Our products, improve the manageability, availability, and performance of consumer electronics, computing, network communication and industrial equipment of all sizes.




FEATURES

- Uninterruptible power system
- Power protection for home and office equipment
- Boost & buck AVR to stabilize voltage
- 6 outlets – w/ surge protection, battery back up, AVR (5), and surge protection only (1)
- Phone, Fax & modem protection (RJ-11)
- USB communication port
- Illuminated power button
- Long back up time
- 510 Joules surge rating
- Power management software CD
- Fire retardant construction

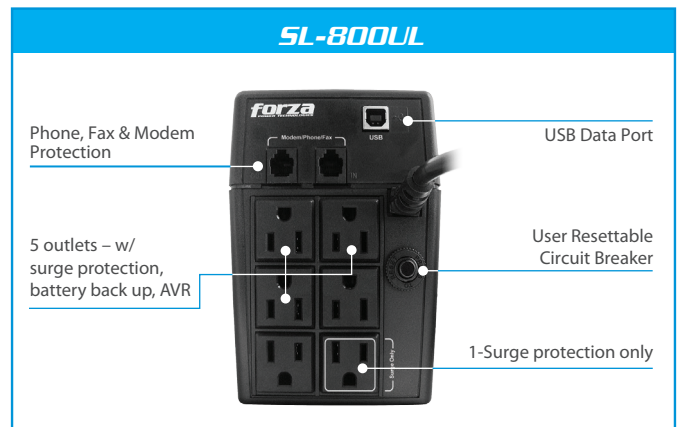

UPS
SL-800UL
Battery Backup
800VA
Automatic Voltage Regulator
440 Joules Surge Protection

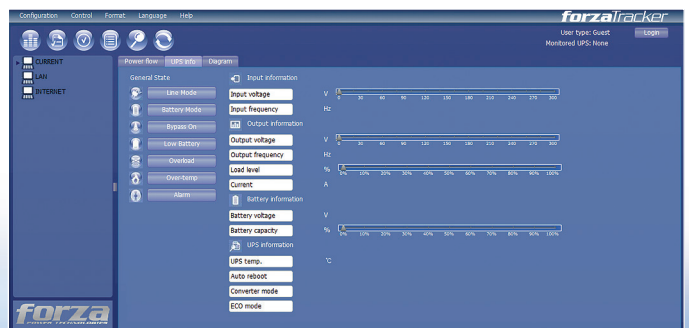

MODEL	FEATURES	SL-800UL
CAPACITY		800VA/480W
INPUT	Input Voltage Compatibility	120VAC
	Input Voltage Range	75-147VAC
	Connection Type	US PLUG (NEMA 5-15P)
	Maximum current	10A
	Cord Length	5.8ft/1.8m
	Frequency	55-65Hz (Auto Sensing)
OUTPUT	Output Nominal Voltage	120VAC
	Output Volt Amp Capacity	800VA
	Output Watt Capacity (watts)	480W
	Output Voltage Regulation (Batt. Mode)	±10%
	Output Frequency	50/60Hz
	Output Frequency Regulation (Batt. Mode)	60Hz ±1Hz
	Output Waveform	Stepped Sine Wave
	Outlet Receptacles Quantity/Type	6 NEMA 5-15R
	Full Battery Support and Surge Protection Outlets	5
	Surge Suppression Outlets Only	1
BATTERY	Battery Type & Number	12V/9.0AH 1PCS
	Back up Time (at a PC load with 17" monitor)	22 minutes
	Recharge Time	6 hours to 90% after complete discharge
VOLTAGE REGULATION	Voltage Regulation Description	120V ±12%
	Output Boost Feature from 89-108 VAC	+18%
	Output Buck Feature from 132-145 VAC	-15%
FREQUENCY REGULATION	Automatic Frequency Selection	YES
LINE/BATTERY TRANSFER	Typical Transfer Time	2-6 ms typical
	Low come back from battery to line power	92VAC
	High come back from battery to line power	142VAC
INDICATOR	AC Mode	Blue LED Light
	Battery Mode	Blue LED Light, Green LED Flashing
	Fault Mode	Blue LED Light
AUDIBLE ALARM	Battery Mode	Sounding every 10 seconds
	Low Battery	Sounding every 1 second
	Overload	Sounding every 0.5 seconds
	Battery Replacement	Sounding every 2 seconds
	Fault	Continuous sounding
PROTECTION	Full Protection	Line Mode: 110%+20%/-10%; shutdown after 5 minutes and go to fault mode. 120%+20%/-10%; shutdown immediately and go to fault mode. Battery Mode: 110%+20/-10%; shutdown after 5 sec. 120%+20%/-10%; shutdown immediately
	Joules	510J
PHYSICAL	Unit Dimension, DXWXH (mm)	330*100*140
	Unit Dimension, DXWXH (in)	13.0*3.94*5.51
	Net Unit Weight (kgs/lbs)	5kg
	Packing Dimensions (mm)	385 *140*228
	Packing Dimensions (in)	15.16*5.51*8.98
	Gross Packing Weight (kgs/lbs)	5.5kg
ENVIRONMENT	Operating Environment	0o to +40o,0 to 90% Relative Humidity(Non-condensing)
	Noise Level	Not to exceed 40dBA, measured 1 meter from any surface
WARRANTY	Product Warranty	2 Years
SPECIAL FEATURES	Communication Port	Yes
	Dataline/Internet/Telephone Line Protection	RJ-11
	"Cold Start" Option	YES
	Auto Charge	Yes
ACCESSORIES	USB Cable	Yes
	Monitoring Software	FORZATRACKER



EMERGENCY BACKUP



MONITORING SOFTWARE
CD INSIDE



USB PORT
CABLE INCLUDED



FIRE
RETARDANT